

# Affinity

interactive kiosk



The Affinity is a major success story and NeoProducts number one selling kiosk with over 10,000 installations, conducting over a million transactions per day. A popular choice amongst both corporate and government sector clients.

**Disability friendly:** Designed with social inclusion in mind, the Affinity incorporates a side mounted display module enabling wheelchair access.

**Cluster configurations:** Designed to be space efficient, these units easily fit together to enable maximisation of space and grouping of applications.

**Robust and scratch resistant:** Designed in cost-effective rugged metal chassis, augmented with injection moulded plastic (polymer), ideal for unsupervised environments and delivering value for money.

**PC-Based:** Based on stand alone pc architecture to ensure future-proofing.



**Versatile application usage:** Information, transactional and education/ training terminal, Government information delivery.



\*Options, at extra cost.



Operating Environment	Temperature	6-32°C (primarily limited by the kiosk processor)
	Humidity	20-80% Non-Condensing
	Ventilation	Natural Convection Cooling
Mains Input	Standard	220-240VAC ±10% 50Hz
	Power	300W average (500W max.) excluding internal power outlet
	Internal Auxiliary DC Supply Rails	24V (for peripheral equipment)
LCD Monitor	Screen Size	15" Angle: 30° (from horizontal)
	Viewing Angle	70°/70°/55°/65° (L/R/T/B) Typical
	Dot Pitch	Max 0.3mm
	Max. Resolution	1024x768 @ 16 million colours
Touchscreen	Screen	High Quality SAW 15" Touchscreen
	Interface	RS232 or USB 9600bps
	Resolution	4096x4096
Dimensions	Height	1115mm
	Width	775mm
	Depth	550mm
	Weight	70kg (80kg with transport packaging)
Maximum PC Dimensions	Height	400mm
	Width	120mm
	Depth	320mm
Guardian Kiosk Management Module**	Printer Monitoring: Paper Low / Out / Jam	
	CPU / Application Heartbeat Monitoring	
	Door Sensor / Auxiliary Device Monitoring	
Options*	Slip/Receipt thermal printer / Guardian Kiosk Management Module / Signage panel / Slim Form Factor PC (or smaller) / Stereo Audio System / 5, 12 & 24VAC 50Hz Power supply / 110VAC 60Hz Power Supply / Card Reader / Ruggedised Phone Handset	
Applications	Information, Transactional	

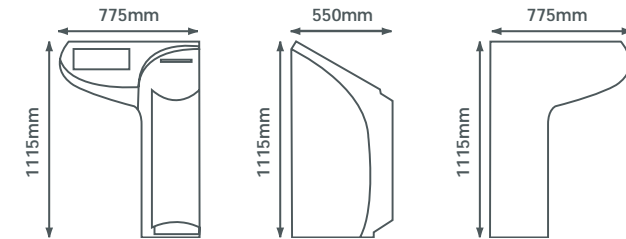

### United Kingdom

NeoProducts (UK) Limited  
69 Melchett Road,  
Kings Norton Business Centre,  
Birmingham, B30 3HP, UK  
Tel. +44 (0)121 486 4300  
Fax. +44 (0)121 486 4334  
Email. neo@neoproducts.co.uk

### Australia

NeoProducts Pty Ltd  
47 Overseas Drive, Noble Park,  
Victoria, 3174, Australia  
Tel. +61 (0)3 9701 1511  
Fax. +61 (0)3 9701 1799  
Email. neo@neoproducts.com.au

[www.neoproductsgroup.com](http://www.neoproductsgroup.com)

interactive communication

\* Options available on Kiosk

\*\* The application and/or browser running on the Kiosk must support the Guardian. For further details contact NeoProducts.